

HAT

INLINE TEMPERATURE CONTROL VALVE

BENEFITS

- Controls fluid return temperatures - ideal for glycol tracing
- Maintains constant discharge temperatures
- Improved system efficiency
- Unaffected by pressure variations

DESIGN FEATURES

- Stainless steel body, fittings, spring, and plug
- Optional leak port available
- Corrosion resistant - long service life
- Exclusive **Thermoloid**® sensor/controller
- Most narrow temperature band available
- Compact low mass - fast response
- Two wrench flats for easy installation
- Ram-type plug for reliable shut-off

TYPICAL APPLICATIONS

- To control temperatures in glycol heat tracing systems, **HAT** valves will maintain the discharge temperature. When glycol temperature exceeds the setpoint, the valve will modulate closed. As heat loss occurs and glycol cools to below the setpoint, the valve will open to allow warmer glycol to circulate.
- **HAT** valves can act as freeze protection for condensate systems. **HAT** valves open when temperatures fall to allow condensate to discharge before freezing.
- In commercial aircraft, high temperature water can unexpectedly travel to the cold water lines. **HAT** valves on cold water lines will limit flow when excessive temperatures are detected, preventing scalding of passengers and crew.
- **HAT** valves used on tank heating coils limit the temperatures of the heating element. By closing before coil temperatures are too high, the **HAT** valves reduce the risk of over-temperature damage. In subcooling steam traps, **HAT** valves reduce problems associated with overheating.
- When used as a sampling system safety shutoff, **HAT** valves will remain open as long as sample temperatures are under the setpoint. If the sample temperature increases, the valve will shut off, protecting analyzing equipment from damage due to high temperature.



OPERATION


A thermostatic element inside the valve senses temperature and if this falls below the setpoint, the valve modulates open to allow flow. When the temperature increases to near the setpoint, the **HAT** valve modulates closed. **HAT** valves are available with built-in leakage to allow bypass flow.

HAT

INLINE TEMPERATURE CONTROL VALVE



PARTS & MATERIALS

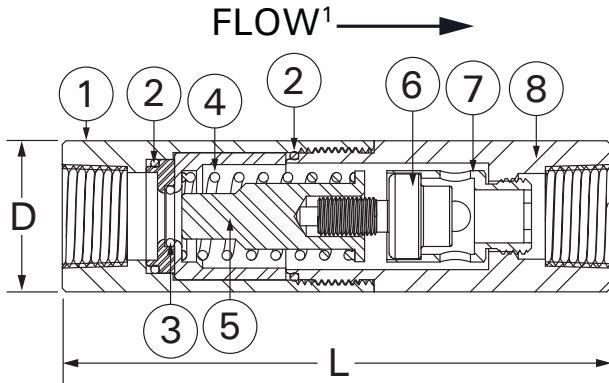

ITEM	DESCRIPTION	MATERIAL
1	BODY - INLET HALF	300 Series S/S
2	BODY SEAL (QTY 2)	EPDM or Viton ²
3	SEAT RING SEAL	PTFE
4	OPERATING SPRING	300 Series S/S
5	RAM-TYPE PLUG	300 Series S/S
6	THERMAL ACTUATOR	Brass or 300 Series S/S
7	ACTUATOR CARRIER	Brass or 300 Series S/S
8	BODY - OUTLET HALF	300 Series S/S

DIMENSIONS & CAPACITIES

SIZE (NPT)	D		L		Weight		Port Size	C _v	Maximum Operating Pressure ¹	Maximum Temperature
	in	mm	in	mm	Lb	Kg				
1/2"	1.25	32	4.5	114	0.9	0.41	C	1.3	300 PSIG (20.7 BAR)	300°F (149°C)
3/4"	1.5	38	5.5	140	1.4	0.64	D	2		

ORDERING

Part Number ^{3,4,7}	Description
134 - 302X00 - XXX	1/2" HAT C-Port
134 - 312X00 - XXX	1/2" HAT C-Port, all S/S
135 - 502X00 - XXX	3/4" HAT D-Port
135 - 512X00 - XXX	3/4" HAT D-Port, all S/S

NOTES

- Flow direction is reversed in valves that close over 210°F (98.9°C). Reverse flow valves are rated for 150 PSIG (10.3 BAR).
- Seal Material compatibility:
 - EPDM - air, glycol, water, steam, ketones, and synthetic hydraulic oils.
 - Viton - air, fuel, oil, gas, petroleum-based hydraulic oils.
- Standard open temperatures "XXX" available: 040°F, 050°F, 055°F, 060°F, 065°F, 075°F, 085°F, 090°F, 095°F, 100°F, 105°F, 110°F, 120°F, 125°F, 130°F, 140°F, 150°F, 155°F, 160°F, 170°F, 180°F, 190°F and 200°F.
 - Note:** Closing temperature is typically 10°F above opening temperature
- Replace singular "X" with 1 for EPDM body seals; 2 for Viton body seals. Other options available, consult our engineers.
- All HAT valves are factory tested and covered by a 36 month warranty.
- A #20 mesh stainer is recommended for use with all port sizes.
- For optional leak port, consult sales department.

