

HAT/FP

FREEZE PROTECTION VALVE



BENEFITS

- Protects against freeze damage
- Primary protection or failsafe backup
- Long service life
- Self operating
- Fast response
- No outside power source required
- Discharges minimum amount of water required

DESIGN FEATURES

- Stainless steel body, fittings, and plugs
- Exclusive **Thermoloid®** thermal actuator
- Corrosion resistant
- Narrow temperature band
- Compact and low mass
- Two wrench flats for easy installation
- Ram-type plug for reliable shutoff

APPLICATIONS

Relying on manually opening valves for freeze protection allows for human error or plugging of partially cracked valves. This annually accounts for large amounts of freeze damage resulting in huge monetary losses associated with repairing damaged equipment, piping, as well as system downtime.

The self-actuating **HAT/FP** valve eliminates the human errors associated with manual valves. The automatic **HAT/FP** valve is ideal for the protection of piping, valves, fittings, pumps, safety showers, condensate systems, fire lines, spray nozzles, or as backup protection on traced systems.


OPERATION

The HAT/FP-35 will initiate flow when the thermostatic actuator senses 35°F (1.7°C) and will remain open as long as the discharge water temperature is below 40°F (4.4°C).

In standard flow, the actuator will sense ambient temperature to initiate flow and then respond to water temperature; in reverse flow, the actuator will sense water temperature.



SAMPLE APPLICATION

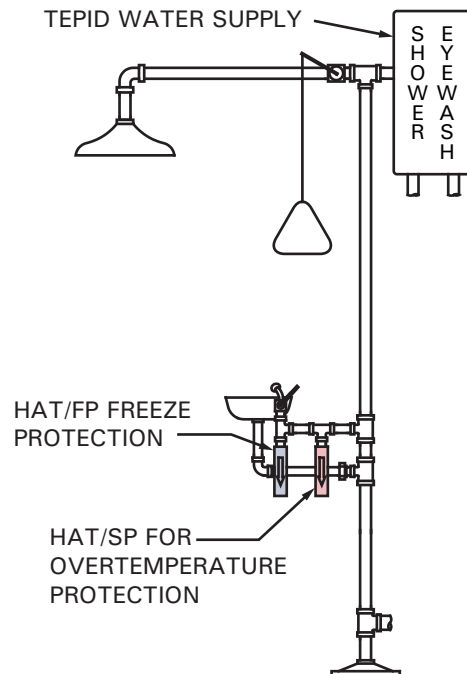


HAT/FP

FREEZE PROTECTION VALVE



PARTS & MATERIALS

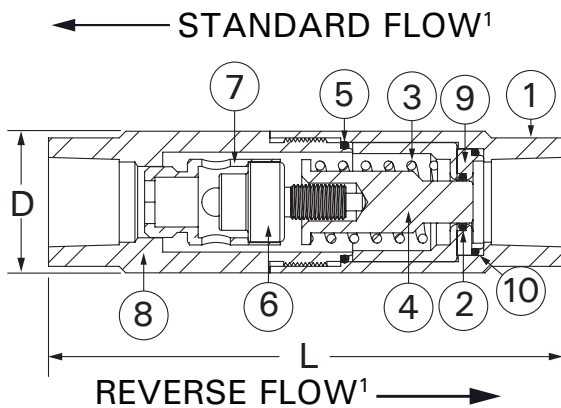

ITEM	DESCRIPTION	MATERIAL
1	BODY - HALF	300 Series SS
2	SEAT SEAL	FEP Encapsulated Viton
3	OPERATING SPRING	300 Series SS
4	RAM-TYPE PLUG	300 Series SS
5	BODY SEAL	EPDM
6	THERMAL ACTUATOR	Brass or SS
7	ACTUATOR CARRIER	Brass or SS
8	BODY - HALF	300 Series SS
9	SEAT INSERT	300 Series SS
10	SEAT INSERT SEAL	EPDM

DIMENSIONS & CAPACITIES

SIZE (NPT)	D		L		Weight		Port Size	C _v	Maximum Operating Pressure ^{1&2}	Maximum Temperature
	in	mm	in	mm	Lb	Kg				
1/2"	1.3	33	4.5	114	0.9	0.4	B	0.8	300 PSIG (20.7 BAR)	300°F (149°C)
1/2"	1.3	33	4.5	114	0.9	0.4	C	1.3		
3/4"	1.5	38	5.5	140	1.4	0.6	D	2		

ORDERING

Part Number	Description
114 - 212100 - 035	1/2" HAT/FP-35-B-SS-E
114 - 812100 - 035	1/2" HAT/FP-35-B-SS-RF-E ¹
114 - 302100 - 035	1/2" HAT/FP-35-C-E
114 - 702100 - 035	1/2" HAT/FP-35-C-RF-E ²
114 - 312100 - 035	1/2" HAT/FP-35-C-SS-E
114 - 712100 - 035	1/2" HAT/FP-35-C-SS-RF-E ²
115 - 502100 - 035	3/4" HAT/FP-35-D-E
115 - 512100 - 035	3/4" HAT/FP-35-D-SS-E
115 - 712100 - 035	3/4" HAT/FP-35-D-SS-RF-E ²

NOTES

- Reverse flow option for B port is rated for 200 PSIG (13.8 BAR).
- Reverse flow option for C & D ports are rated for 150 PSIG (10.3 BAR).
- 316 SS and other materials are available. Consult our engineers for more information.
- Full open/close temperatures: 35°F (1.7°C)/40°F (4.4°C).
- A #20 mesh strainer is recommended.
- Warranty information disclosed at www.thermomegatech.com/terms-conditions/



ThermOmegaTech®, Inc.
353 Ivyland Road
Warminster, PA 18974

1-877-379-8258
www.ThermOmegaTech.com

HATFP
Rev: 7/10/18

