

1" GURU® PC & HEATER ASSEMBLY

PASSENGER CAR FREEZE PROTECTION

BENEFITS

- Eliminates costly freeze damage in passenger cars
- Easy installation
- Completely mechanical, no outside power required
- Minimal maintenance required
- High flow design for rapid draining

DESIGN FEATURES

- Low lead brass/bronze
- Self-operating valve
- Dual port seals
- No power or air required when used without heater
- Inline serviceable
- Easy maintenance

OPERATION

The 1" GURU PC valve is self-contained and drains water bearing systems automatically before freeze damage can occur by monitoring ambient temperatures. Freezing conditions which put water tanks and piping at risk for freeze damage occur when the car heat is turned off for switching locomotives or even brief layovers. Since the valve is completely mechanical, no electrical or air connections are required. When used with the optional heater assembly, we provide a 5 foot power cable and wiring diagram for hard wiring or various plugs of your choice.


HEATER ASSEMBLY

Valves placed in equipment cabinets tend to be colder than the heated passenger areas and do not heat up quickly when the car heat is turned on again. This can significantly delay the ability to refill the water systems and get the car back into service after a valve activation. The heater assembly causes the valve to heat up and close quickly. This allows refilling of the water system and getting the passenger car back into service as quickly as possible.



DESIGN FEATURES

- 2 LED lights for easy visual status check of power and heater
- Self limiting heater
- No moving parts to wear
- 2-piece circuit board to prevent breakage
- Easy installation/removal with one hand or gloves
- Dual voltage - 120VAC & 74 VDC¹

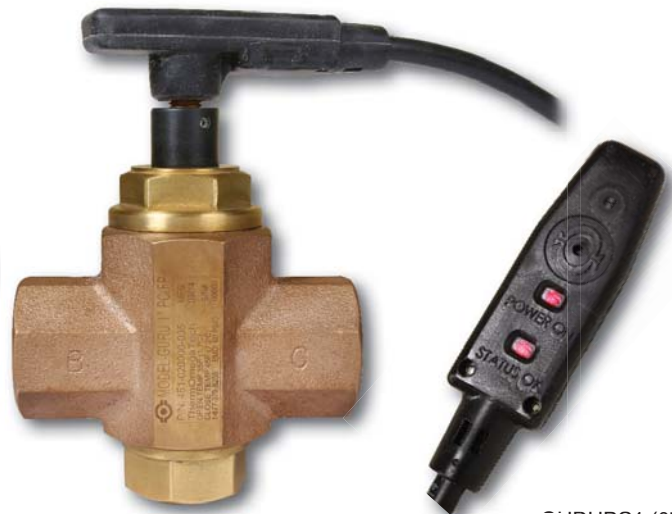


1" GURU® PC & HEATER ASSEMBLY

PASSENGER CAR FREEZE PROTECTION



PARTS & MATERIALS

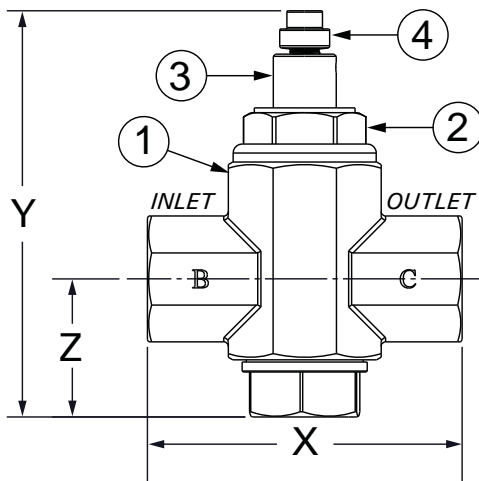

ITEM	DESCRIPTION	MATERIAL
1	VALVE BODY	Low lead Bronze
2	VALVE CAP	Brass
3	INSULATOR BUSHING	Acetal Plastic
4	THERMAL ACTUATOR	Brass

DIMENSIONS & CAPACITIES

END CONNECTIONS ²	X	Y	Z	Weight	Cv	Full Open Temperature	Maximum Operating Pressure
1" NPT	4-3/8 in.	5-5/8 in.	1-7/8 in.	4.11 Lb	6.3	35°F	120 PSIG (8.3 BAR)
	11.1 cm	14.3 cm	4.8 cm	1.86 Kg		1.7°C	

ORDERING

Part Number	Description
451-000000-035	1" GURU PC
455-000000-060	Heater with plug and 5ft. cord ^{3,4}

NOTES

1. Other voltages available
2. Other pipe thread sizes and international standards are available
3. Other wiring options available
4. Complies with fire safety requirements under Title 49, Chapter II, Part 238.103



ThermOmegaTech, Inc.
353 Ivyland Road
Warminster, PA 18974

1-877-379-8258
www.ThermOmegaTech.com



Because of continuous improvements, ThermOmegaTech, Inc. reserves the right to change the design and specifications without notice