

ThermOmegaTech®

MAINTENANCE INSTRUCTIONS STAINLESS STEEL WASHDOWN GUN


The ThermOmegaTech® Stainless Steel Washdown Gun® is recommended to be routinely maintained to ensure proper performance.

Installation Steps:

1. Apply thread sealant suitable for the application to the ½ NPT threads on the washdown gun.
2. Thread the washdown gun onto the hose and tighten securely.

Maintenance Steps:

1. Depressurize system and allow for washdown gun to cool down. Unthread the washdown gun from the washdown hose.
2. Remove the top cover (A). (image 1)
3. Hold back the trigger handle. (image 2)
4. Unscrew and remove the hexnut (B). (image 3)
5. Unscrew the adjustable screw (C). (image 4)
6. Remove the spring and axle with nozzle pin. (image 5)
7. Clean the inside of the washdown gun.
8. Put O-ring lubricant compatible with Viton rubber on the nozzle pin with the 2 O-rings. (image 6)
9. Put the spring and axle back insider the washdown gun.
10. Mount the axle with the adjustable screw (C).
11. Pull in the axle with the trigger handle (D).
12. Mount the hexnut (B).
13. Put on the cleaned topcover (A).

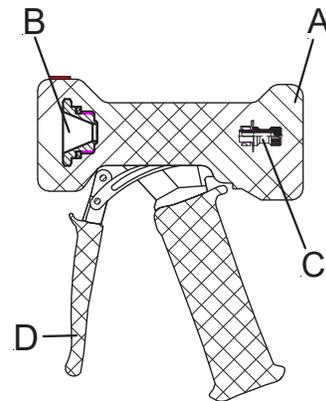

1.



2.



3.



4.



5.



6.

Proper Use: Use ThermOmegaTech® products only as specified to ensure performance, safety, and regulatory compliance.

No Modifications: Do not modify ThermOmegaTech® products, as changes may void warranties and violate regulations (e.g., RoHS, REACH).

Proper Disposal: Dispose of end-of-life products per local hazardous substance regulations; contact ThermOmegaTech® or recycling facilities for guidance.

 **WARNING:** This product can expose you to chemicals, for example lead, nickel, acrylonitrile, which are known to the State of CA to cause cancer, birth defects, or reproductive harm. For more information, go to www.P65Warnings.ca.gov

Warranty information disclosed at www.thermomegatech.com/terms-conditions/

SS WASHDOWN GUN_IM1
REV: 3/24/2026